



DETAIL AND SUBMITTAL SHEET

DISTRIBUTOR: _____ CONTRACTOR: _____

MODEL NUMBER: _____ PROJECT: _____

QUANTITY: _____ APPROVED BY: _____

ARCHITECT: _____ DATE: _____

JL INDUSTRIES
INCORPORATED

4450 W. 78th Street Circle
Bloomington, MN 55435
Phone: 952-835-6850
FAX: 952-835-2218

JL WEST COAST 6285 RANDOLPH STREET, COMMERCE, CA 90040 PHONE: 323-726-9070 FAX: 323-726-9068
JL SOUTH EAST 5758 CORPORATION CIRCLE, FT. MEYERS, FL PHONE: 941-693-7500 FAX: 941-693-7501

RECESSED MOUNTED CEILING PANELS

MODEL CT FOR TILE OR DRYWALL CEILINGS

Sound control and appearance are the important features of Model CT: When installed, indiscernible, yet keeping acoustical surfaces intact. A covering of acoustical tile or drywall is applied to the recessed door panels with exposure of only the narrow frame edges. To blend with plaster or tile, units are painted white.

Acoustical tile up to 1" thick is accommodated by the recessed panel. Adhesive mastic of adequate depth attaches the tile to the door and ensures that it is flush with adjoining tile field. A continuous hinge, located at the outside edge of the door ensures easy opening of the plaster or tile covered panel. Screwdriver operated cam locks are provided, the size of the door determining the number. If desired, a key-operated cylinder lock, in place of one cam lock can be furnished.

To install: Construct a framed opening with 1-1/2" cold rolled channels or like sections and bolt, attaching the units to the framing components. All four sides of the doors frame have punched bolt slots.

NOTE: This model is not recommended for grid-type ceiling tile.

MODEL CP FOR PLASTER CEILINGS

Model CP make use of a 1/2" recessed door panel, and also includes a 1/4" layer of 22 gauge galvanized expanded metal lath welded into the recess.

In addition, 3" wide expansion wings are welded to the perimeter of the frame.

SPECIFICATIONS

Materials

Door: 18 gauge steel
Frame: 16 gauge steel
Finish: White primer coat (CT) or gray primer coat (CP) over a phosphate dipped steel. This coating can be used as a finish or as a prime coat.

Hinge

Continuous hinge mounted on the long side of oblong panels.

Lock


___ Flush screwdriver operated cam standard.
___ Cylinder lock (with 2 keys) is available in place of one cam lock (at extra charge). Lock is key coordinated to fit J. L. Fire Extinguisher cabinet as well. Plastic grommet used to finish access hole through tile for control of cam lock.

Packaging

One panel per carton.

MODEL CP SIDE VIEW


REFER TO TABLE

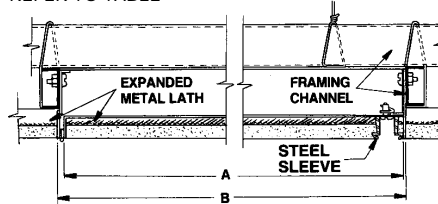

MODEL CT

MODEL CT SIDE VIEW

REFER TO TABLE

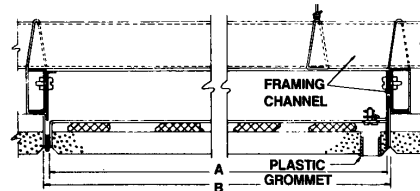

MODEL CP

DOOR SIZES AND CEILING OPENINGS: MODEL CT

• DIMENSIONS IN INCHES • WEIGHT IN POUNDS

A - MODEL SIZE WIDTH X HEIGHT	B - OUTSIDE FRAME DIMENSIONS		SHIPPING WEIGHT	LATCHES
	WIDTH	LENGTH		
___ 12" x 12"	12 1/4"	12 1/4"	7	1
___ 12" x 24"	12 1/4"	24 1/4"	11	2
___ 18" x 18"	18 1/4"	18 1/4"	12	2
___ 22" x 30"	22 1/4"	30 1/4"	18	2
___ 24" x 24"	24 1/4"	24 1/4"	17	2
___ 24" x 36"	24 1/4"	36 1/4"	27	3
___ x _____	_____ "	_____ "		

DOOR SIZES AND CEILING OPENINGS: MODEL CP

• DIMENSIONS IN INCHES • WEIGHT IN POUNDS

A - MODEL SIZE WIDTH X HEIGHT	B - OUTSIDE FRAME DIMENSIONS		SHIPPING WEIGHT	LATCHES
	WIDTH	LENGTH		
___ 12" x 12"	12 1/4"	12 1/4"	9	1
___ 12" x 24"	12 1/4"	24 1/4"	13	2
___ 18" x 18"	18 1/4"	18 1/4"	14	2
___ 22" x 30"	22 1/4"	30 1/4"	21	2
___ 24" x 24"	24 1/4"	24 1/4"	20	2
___ 24" x 36"	24 1/4"	36 1/4"	31	3
___ x _____	_____ "	_____ "		

SPECIAL SIZES AND SPECIAL MODIFICATIONS CAN BE FABRICATED ON REQUEST.

For information on security access panels: See J.L. Industries Detention Specialties, Sweet's 11190/JLI or call factory.